

Mekanord Service Kits


For our 190-400 gearbox's



Advantages:

- No missing parts during service
- Lower prices
- Extend gearbox lifetime and availability
- Easy handling
- Reduced downtime
- No expert knowledge essential

Serial Number:	
Type Number:	

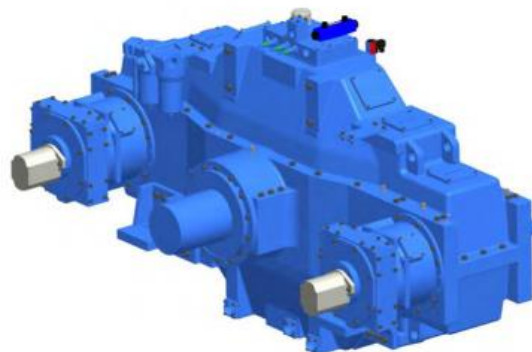

Kit No.	Service kit 1	Service kit 2	Service Kit 3	Service Kit 4
Recommended when:	Always to have onboard	Halfway into the season together with an oil change	Every year before season start combined with an inspection	Big service overhaul to prevent problems with the oil system. Or to have onboard if there should arise a urgent problem.
Components included:	Oil filter + O ring.	Oil filter + O ring. Anodes for the oil cooler.	Oil filter + O ring. Anodes and O rings for the oil cooler.	Oil filter + O ring. Anodes + O rings for the oil cooler. Oil pump + O rings. Oil thermostat + O rings. Potentiometer for piston rod. Oil control valve Oil cap w/Strainer.
Recommended replacement ratio:	First time after 200 hours. After this every 1000 hours or once a year	Every 6 months	Once a year	Every 5 years
Oil Recommends	Viscosity: ISO VG 150 (FZG ≥ 12) DIN 51517 part 3, CLP 150 - ISO 12925-1, CKD 150			